

# Rensedæksel


# ESHIU



## Beskrivelse

Rensedækslet er forsynet med Safe gummitætning. Passer i SR-rør. Rensedækslet er isoleret.

## Dimensioner

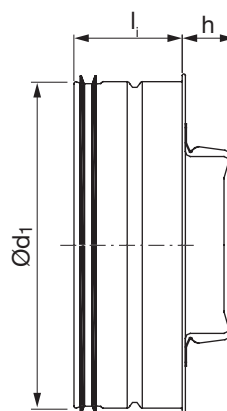

### 25 mm isolering

| Ød <sub>1</sub><br>nom | l <sub>i</sub><br>mm | h<br>mm | m<br>kg |
|------------------------|----------------------|---------|---------|
| 100                    | 60                   | 10      | 0,30    |
| 125                    | 60                   | 37      | 0,40    |
| 150                    | 60                   | 37      | 0,55    |
| 160                    | 60                   | 37      | 0,60    |
| 200                    | 60                   | 37      | 0,90    |
| 250                    | 80                   | 37      | 1,50    |
| 300                    | 80                   | 37      | 1,80    |
| 315                    | 80                   | 37      | 1,90    |

### 50 mm isolering

| Ød <sub>1</sub><br>nom | l <sub>i</sub><br>mm | h<br>mm | m<br>kg |
|------------------------|----------------------|---------|---------|
| 100                    | 80                   | 37      | 0,35    |
| 125                    | 80                   | 37      | 0,45    |
| 150                    | 80                   | 37      | 0,55    |
| 160                    | 80                   | 37      | 0,65    |
| 200                    | 80                   | 37      | 1,00    |
| 250                    | 100                  | 37      | 1,60    |
| 300                    | 100                  | 37      | 1,95    |
| 315                    | 100                  | 37      | 2,05    |

## Bestillingskode

|                           |       |     |
|---------------------------|-------|-----|
| Produkt                   | ESHIU | 160 |
| Dimension Ød <sub>1</sub> |       |     |

|    |
|----|
| 1  |
| 2  |
| 3  |
| 4  |
| 5  |
| 6  |
| 7  |
| 8  |
| 9  |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |